

SIEMENS

Product data sheet

3TH4382-0AP0


Abb. ähnlich / similar picture

CONTACTOR RELAY 82E EN 50 011 8NO+2NC,
SCREW TERMINALS AC OPERATION AC 230/220V
50HZ,
276/264V 60HZ

General details:

Size of the contactor

0

Control circuit:

Type of voltage

AC

Control supply voltage

• at 50 Hz / for AC / rated value / minimum	230 V
• at 50 Hz / for AC / rated value / maximum	230 V
• at 60 Hz / for AC / rated value / minimum	277 V
• at 60 Hz / for AC / rated value / maximum	277 V

Supply voltage frequency / for auxiliary and control current circuit / rated value / minimum

50 Hz

Supply voltage frequency / for auxiliary and control current circuit / rated value / maximum

60 Hz

Main circuit:

Operating current / at AC-14 / at AC-15 / at 230 V / rated value

10 A

Auxiliary circuit:

Identification number and letter for switching elements

82 E


Number of NC contacts / for auxiliary contact

2

• delayed switching

0

• asynchronous switching	0
Number of NO contacts / for auxiliary contact	8
• delayed switching	0
• asynchronous switching	0
Number of change-over switches / for auxiliary contact	0
Connection type:	
Design of the electrical connection / for auxiliary and control current circuit	screw-type terminals
Mechanical design:	
Type of fixing/fixation	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

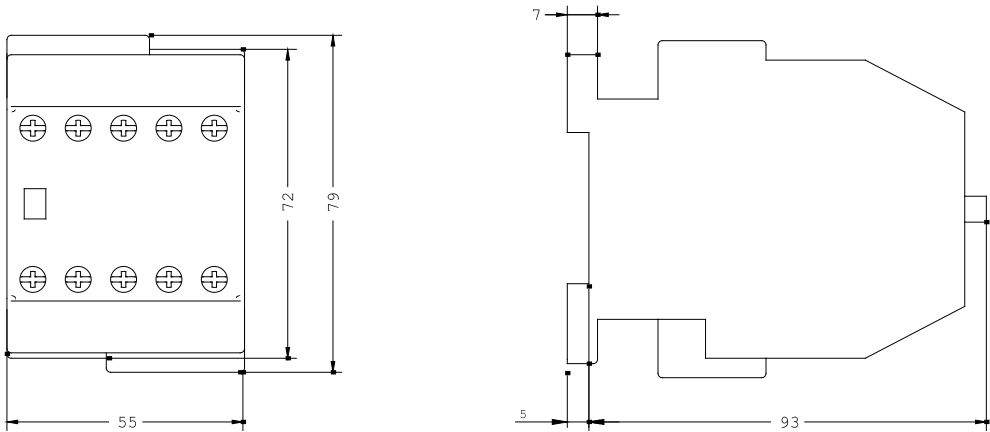

last change:

10/31/2006

Technical Assistance:	Telephone:	+49 (0) 911-895-5900 (8°° - 17°° CET)
	Fax:	+49 (0) 911-895-5907
	E-Mail:	technical-assistance@siemens.com
	Internet:	www.siemens.de/lowvoltage/technical-assistance